PETRIFIED HICKORY

15x61cm / 6”x24”

15x61cm / 6”x24”
BULLNOSE

SHADE
VARIATION V3

PETRIFIED HICKORY PACKAGING INFORMATION						
SIZES AVAILABLE	PCS/CTN	WT/CTN	SF/CTN	CTNS/PLT	SF/PLT	PEI
6" × 24"	12	54 lbs	12	48	576	4
6" × 24" - BULLNOSE	20	54 lbs	N/A	48	N/A	4

PETRIFIED HICKORY KEY FEATURES					
Water Absorption	Breaking Strength	Shade Variations	Mohs	Chemical Resistance	D.C.O.F. Wet
0.5%	400 lbs	V3	7	RESISTANT	≥0.42
*Key features apply to floor tile only.			CERTIFIED PORCELAIN TILE 0.5% or less water absorption		

LINT TILE
111 NOTCH LANE WENDEL, PA 15691
P: 800-245-5564 F: 724-446-9252
www.linttile.com

PETRIFIED HICKORY

Digital Ink-Jet Porcelain

PETRIFIED HICKORY ANCIENT

ALSO AVAILABLE- 6”x24” BULLNOSE

PETRIFIED HICKORY
#600 ANCIENT
15x61cm / 6"x24"

SHADE
VARIATION V3

PETRIFIED HICKORY FOSSIL

ALSO AVAILABLE- 6”x24” BULLNOSE

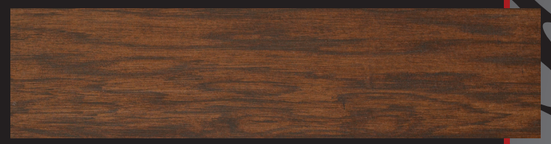

PETRIFIED HICKORY
#700 FOSSIL
15x61cm / 6"x24"

SHADE
VARIATION V3

PETRIFIED HICKORY FOSSIL

PETRIFIED HICKORY RELIC

ALSO AVAILABLE- 6”x24” BULLNOSE

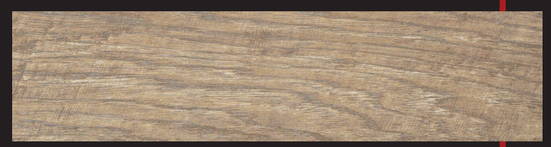

PETRIFIED HICKORY
700 RELIC
15x61cm / 6"x24"

SHADE
VARIATION V3

PETRIFIED HICKORY RELIC

PETRIFIEDHICKORY-12-26-18.indd 2 4/27/22 11:14 AM