

# **LINT TILE**

## **PLATFORM PRODUCTS**

---

2023 - 2024 Edition



111 NOTCH LANE WENDEL, PA 15691  
P: 800-245-5564 F: 724-446-9252  
[www.linttile.com](http://www.linttile.com)



# ***LINT TILE***



## **OUR PARTNER**

THE FUTURE OF SELF LEVELING UNDERLAYMENTS IS HERE! Synthecem™ Cement Technology is a purpose-driven, hydraulic cement underlayment technology that optimizes successful installations. Working from a baseline of European Technology, Synthecem sets a new performance standard by combining a proprietary blend of carefully controlled cements (including portland cement) and chemical admixtures. Integration of Synthecem DNA means products offer outstanding dimensional stability, bond, self-leveling and smoothing characteristics. Clean, prime and pour with Synthecem powered products to generate flat, smooth and hard surfaces that are suitable for all finished flooring. Materials utilizing Synthecem technology facilitate flat, durable floors that provide for efficient flooring installation and increase the value of a whitespace. Materials utilizing Synthecem technology require less surface preparation, ensuring maximum jobsite versatility, less work, more forgiveness and better outcomes for contractors.



# Table of Contents

4



5



6



SELF LEVELING UNDERLAYMENTS.....	3-4
MOISTURE MITIGATION.....	6
PATCH.....	7-8
PRIMERS.....	9
UNCOUPLING.....	10

8



9



10



# SELF LEVELING UNDERLAYMENTS

## PLATFORM L2 SELF-LEVELING UNDERLAYMENT

Vendor Item #L2- Style #DE-LEV PLAT-L2

### Self-leveling Underlayment Designed to Facilitate Flat Floors and Hold Slope

- Synthecem™ technology
- Low surface preparation
- Install 1/4" to 2+ NEAT
- Foot traffic in 3-4 hours
- Reduced dust
- Suitable for light trade traffic
- Slope from 1" to feather over 5 ft
- Smooth, flat and hard surface



50LB 1PC/CTN 48CTN/PLT

## PLATFORM L3 SELF-LEVELING UNDERLAYMENT

Vendor Item #L3- Style #DE-LEV PLAT-L3

### Premium, High Flow, High Strength Self-leveling Underlayment for Flat Smooth Floors

- Extended placement time
- Foot traffic in 3-4 hours
- Hard surface withstands trade traffic
- High strength and material hardness
- Resist wheel tracking
- Low surface preparation - Synthecem™ Technology
- For installations down to 1/8" and up to 2+"
- For high end flooring that requires restrictive flatness tolerances



50LB 1PC/CTN 48CTN/PLT

## EVERY DAY LIGHTWEIGHT SELF-LEVELING UNDERLAYMENT

Vendor Item #ELW- Style #DE-LEV PREP-ELW

### Everyday Light Weight Self-leveling Underlayment

- Reduced dead load
- Lighter lifting
- Superior Sustainability
- Low-Surface Prep
- Exceptional volume stability
- Feather edge up to 2" in depth neat
- Suitable for finished flooring including tile, vinyl, LVT, rubber, carpet & engineered wood
- Supports Fast Track installation- install flooring in 4 hours



33LB 1PC/CTN 48CTN/PLT

## FAST TRACK, SELF DRY SELF-LEVELING UNDERLAYMENT

Vendor Item #FT- Style #DE-LEV PREP-FT

### Fast Track Self-leveling Underlayment

*PrepPro Fast Track (FT) self-leveling underlayment (SLU) is a premium self-drying, calcium aluminate cement based self-leveling underlayment with superior placement characteristics and low surface prep capability.*

- Cover as early as 4hrs
- Low-Surface Prep
- Superior flow
- Holds light trade traffic during build out



50LB 1PC/CTN 48CTN/PLT



## Fiber Reinforced Gypsum Self-Leveling Underlayment



50LB 1PC/CTN 48CTN/PLT

## SKIMFLOW® LCB SELF-LEVELING UNDERLAYMENT

Vendor Item #LCB- Style #DE-LEV SKIM-LCB



*SKIMFLOW® LCB is a gypsum based self-leveling underlayment designed for use directly over wood. The product is reinforced with fibers for superior performance over flexible substrates. SKIMFLOW® LCB may be poured directly over wood without mechanical reinforcement to provide a quick dry, smooth surface for approved floor coverings.*

- Outstanding flexural strength
- Suitable for plywood and gypsum subfloors
- Durable high strength specialty cement
- Outstanding heal
- Non-alkaline - adhesive friendly
- Withstands construction/renovation traffic


## SKIMFLOW® LP SELF-LEVELING UNDERLAYMENT

Vendor Item #LP- Style #DE-LEV SKIM-LP

*SKIMFLOW® LP is self-leveling underlayment with hybrid gypsum hydraulic cement technology designed to facilitate ramping. Addresses out of level or old damaged floors in residential, commercial, institutional and renovation environments. Dries to a smooth hard surface that facilitates application of flooring in 16 hours. Applies over clean, sound substrates including concrete, gypsum, wood, corrugated steel deck & over well bonded adhesives. Optimized for installation from 1/4" to 3" NEAT in a single lift, in climate controlled interior environments. Offers compressive strengths exceeding 4100 psi (28 days) and is compatible with some sound attenuation systems.*

- Long working time - flowable for 30 minutes
- Typically requires no mechanical preparation of concrete substrates
- Optimized for installation from 1/4" to 3" NEAT
- Smooth, hard surface compatible with a wide variety of flooring adhesives
- Mold Resistant
- Suitable for under floor heating systems, electrical and hydronic
- Suitable for installation over a wide variety of substrates


## Hybrid Gypsum Hydraulic Cement Self-Leveling Underlayment

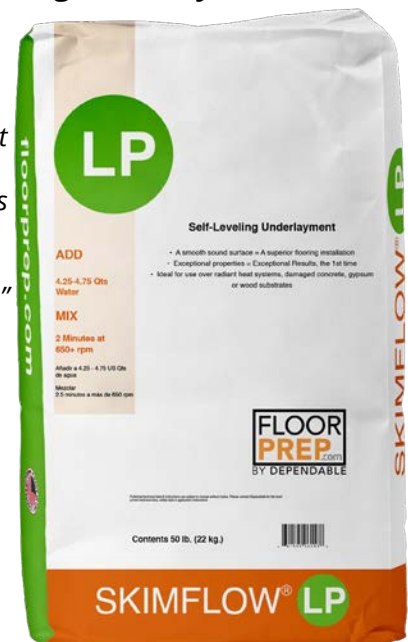

50LB 1PC/CTN 48CTN/PLT



## Hybrid Cement High Flow Self-Leveling Underlayment

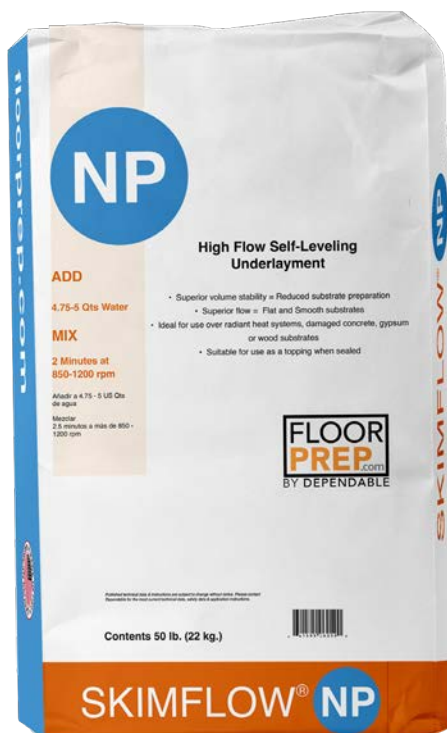

50LB 1PC/CTN 48CTN/PLT

## SKIMFLOW® NP SELF-LEVELING UNDERLAYMENT

Vendor Item #NP- Style #DE-LEV SKIM-NP

*SKIMFLOW® NP (No Problem) is a hybrid cement self-leveling underlayment designed for time sensitive projects, where compromised substrates make shrinkage undesirable. SKIMFLOW® NP offers no-shrink, no-profile, technology to fast-track jobs, without sacrificing performance.*

- No mechanical preparation of concrete substrates is required on most applications
- Self-drying; walkable in 2 hours in optimal conditions
- Hard surface withstands light trade traffic within hours and regular trade traffic in 16 hours
- Will not degrade if temporarily exposed to water (designed for dry environments)
- Will not support mold growth
- Suitable for under-floor heating systems, electrical and hydronic
- Suitable for installation over a wide variety of substrates
- Compatible with some sound attenuation systems
- Suitable for finished flooring such as vinyl, LVT, carpet, engineered wood, ceramic and more

## PERIMETER ISOLATION STRIP

Vendor Item #KeedeBand- Style #DE-PER PER-STRIP

*KeedeBand™ is a triple layer waterproofing band designed for the KeedeRoll™ 300 uncoupling mat. It is designed to be used under the seams and the perimeter of the wall where of KeedeRoll™ 300 is used. KeedeBand™ completes the waterproofing system of the KeedeRoll™ 300.*



## Triple Layer Waterproofing Band

- Waterproof fabric
- Double laminated
- 5" width for easy installation



50 LN FT - 14/CTN 10CTN/PLT

# MOISTURE MITIGATION



## PLATFORM EMS MOISTURE MITIGATION KIT

Vendor Item #EMS- Style #DE-MOI PL-EMS

### Advanced Epoxy Resin Moisture Mitigation Solution

*Platform EMS is suitable for installation in concrete on floors with RH levels up to 100% RH.*

- 100% solids BA and NP free epoxy
- One coat, low viscosity application
- Low VOC and low odor
- Advanced epoxy resin system addresses vulnerability to osmotic blistering
- Compliant with ASTM F3010-13; Permeability less than 0.1 perm at 12 mils in dry film thickness (DFT)

3.16 GAL KIT 1PC/CTN, 24CTN/PLT

## PREPPRO SLV MOISTURE MITIGATION KIT

Vendor Item #SLV- Style #DE-MOI PREP-SLV

*PrepPro SLV is a very low viscosity water-based surface strengthening epoxy primer. A single coat application, PrepPro SLV penetrates compromised gypsum or lightweight concrete and provides a strengthened surface prior to application of leveling, patching, waterproofing, or installation of flooring goods. PrepPro SLV may also be utilized to treat stable surfaces that suffer from hairline cracking. Once cured, PrepPro SLV is typically compatible with primers & adhesives for non absorbent surfaces.*

- Penetrates and consolidates weak, dusty surfaces
- One coat system with low odor, and low VOC
- Fast, cost efficient repair solution

### Penetrating, Consolidating Low Viscosity WB Epoxy




.63 GAL KIT 1 PC/CTN 50 CTN/PLT

ORDERS: 800-245-5564 - CREDIT APPLICATIONS: [www.linttile.com/forms](http://www.linttile.com/forms)



# PATCH

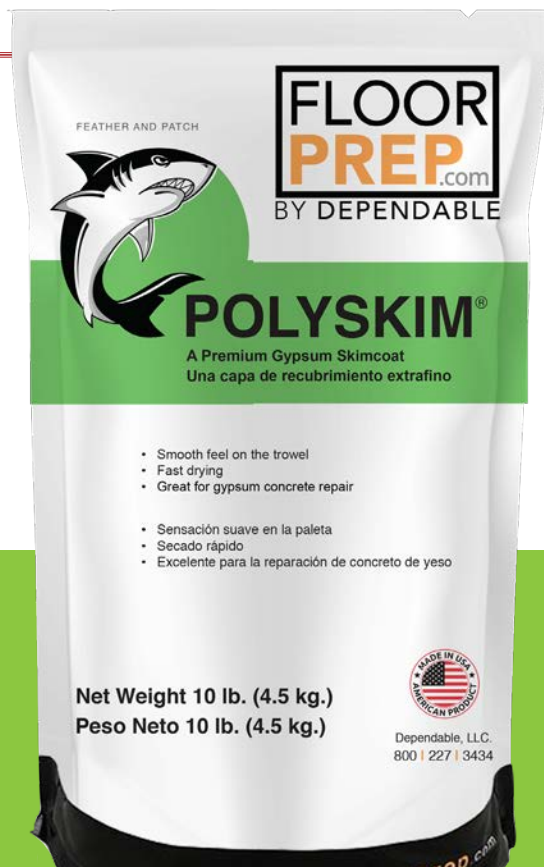

## POLYSKIM® PATCH & SKIM COAT

Vendor Item #POLYSKIM - Style #DE-PAT POLY-10,  
#DE-PAT POLY-25

### Premium, Polymer Modified Gypsum Patching Compound

*POLYSKIM® is a premium gypsum based skimcoat designed for use over gypsum concrete, wood, and other surfaces. POLYSKIM's polymer modified formula allows for a creamier feel under the trowel, enhanced bond, and superior dry time.*

- Smooth feel on the trowel
- Fast drying
- Great for gypsum concrete repair
- 10 lb (4.5 kg) resealable plastic pouch
- 25 lb (11.3 kg) bag kraft paper, double wall bag

10LB- 4PC/CTN 45CTN/PLT  
25LB- 1PC/CTN 90CTN/PLT

## PREPPRO FEATHER TROWELABLE UNDERLAYMENT & PATCH

Vendor Item #Feather - Style #DE-PAT FEATHER

*PrepPro Feather is a latex modified, fine textured, trowel applied, rapid drying cementitious underlayment for interior use. PrepPro Feather provides a smooth, durable surface for the installation of a variety of floor finishes such as vinyl, carpet, engineered wood or tile. PrepPro Feather requires only the addition of water and mixes to a creamy consistency that is troweled with minimal effort to smooth imperfections in a variety of substrates prior to application of floor finishes. PrepPro Feather dries rapidly, permitting the installation of floor coverings in as little as 30 minutes.*


- Dries rapidly
- Creamy consistency & reduced application effort
- Apply from Featheredge to 1/2" (12mm)
- Easy water ratio 2:1 (powder:water)
- Bonds to many substrates without primer or need of additive

### Trowelable Flooring Underlayment & Patch



10LB- 4PC/CTN 45CTN/PLT



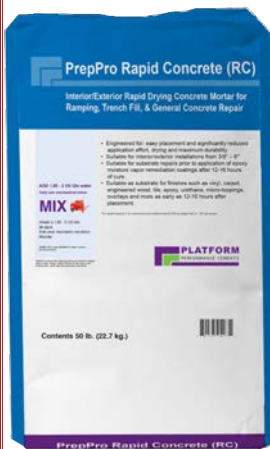

## Interior/Exterior Rapid Drying, Screedable Concrete Mortar

*PrepPro RC provides a smooth, durable surface for the installation of a variety of finishes such as vinyl, carpet, engineered wood, tile, underlayment, micro toppings & epoxy as quickly as 12 hours. Water soluble. Mixes to a high slump consistency. Troweled with minimal effort to smooth imperfections in many substrates. Uses exceptionally low water, providing a durable, low porosity concrete.*

- Easy application effort, drying & maximum durability.
- Suitable for interior/exterior installations from 3/8" - 6"
- Suitable for substrate repairs prior to application of epoxy moisture vapor remediation coatings
- Works as substrate for finishes 12 hrs after placement
- Bonds to most substrates without primer
- Supports points on LEED® Certified projects

50LB 1PC/CTN 48CTN/PLT

## PREPPRO RAPID CONCRETE SCREEDABLE CONCRETE MORTAR

Vendor Item #RC - Style #DE-PAT RC

## SKIMCRETE® XL PATCH

Vendor Item #SKIMCRETE - Style #DE-PAT SKIMXL-25,  
#DE-PAT SKIMXL-50

*SKIMCRETE® XL is a fast drying, polymer modified, cementitious patch. It is fast drying yet it has an extra long pot life, extending your working time, not delaying your finish. SKIMCRETE XL is easy to work with on virtually any interior surface.*

- Long working time
- Quick uniform drying time, regardless of thickness
- No additives or primers for most uses
- Featheredge to 5/8" thick
- Superior workability
- Lowest alkalinity, adhesive friendly
- Creamy, grit-free application
- No dusting or cracking



25LB- 1PC/CTN 90CTN/PLT  
50LB- 1PC/CTN 36CTN/PLT



## WHITE SKIMCOAT™ PATCH

Vendor Item #SKIMCOAT - Style #DE-PAT WHSKIM-25,  
#DE-PAT WHSKIM-50

### Quick Setting, High Strength & Fast Drying Patch

- Cover virtually any surface (even walls)
- Mildewcide protected
- Rapid drying
- High strength
- Non alkaline-adhesive friendly
- Dimensionally stable-no shrinkage
- Grit Free

25LB- 1PC/CTN 90CTN/PLT  
50LB- 1PC/CTN 36CTN/PLT

# PRIMERS

## Universal Primer & Sealer for All Substrates



*Maximum versatility for market leading bond strength on both porous (eg. concrete) and non-porous (eg. epoxy) substrates. Fast drying P360 formula allows application of self-leveling underlayment in 45 – 90 minutes. High solids permits regular dilutions of 3:1 (water:primer) providing exceptional coverage rates of 800 – 1200 sq ft. per gallon. New technology polymer is entirely resistant to environments of pH 14 for extended periods of time. One primer, superior outcomes.*

- Fast drying
- Maximum versatility for porous and non-porous substrates
- Exceptional bond performance
- Prolonged resistance to pH 14
- Excellent coverage
- Low odor and low-VOC

1 GAL 4PC/CTN 36CTNS/PLT  
5 GAL 1PC/CTN 36CTNS/PLT

## PLATFORM P360 UNIVERSAL SUBSTRATE PRIMER

Vendor Item #P360 - Style #DE-PRI PL-P3601G,  
#DE-PRI PL-P3605G

## WHITE LATEX PRIMER OR ADDITIVE

Vendor Item #LATEX LIQUID - Style #DE-PRI LATEX-1G,  
#DE-PRI LATEX-5G

*WHITE LATEX LIQUID® is formulated for use with WHITE SKIMCOAT™ Underlayment, it provides greater adhesion, water resistance, flexibility and mildewcide protection. It may be used as an additive with SKIMCRETE® XL or other trowelable products wherever a non re-emulsifiable latex primer or additive is required. It also may be used as a primer over textured or smooth metal surfaces, adhesive residues, or under leveling products used in exterior applications under certain circumstances in accordance with specific instructions.*

- Outstanding adhesion to most substrates
- Mildewcide protection
- Outstanding flexural strength
- Effective additive or primer




**Adhesion, Water Resistance, Flexibility and Mildewcide Protection**

1 GAL 4PC/CTN 36CTNS/PLT  
5 GAL 1PC/CTN 36CTNS/PLT

# UNCOUPLING

## Synthetic Honeycomb Lathe

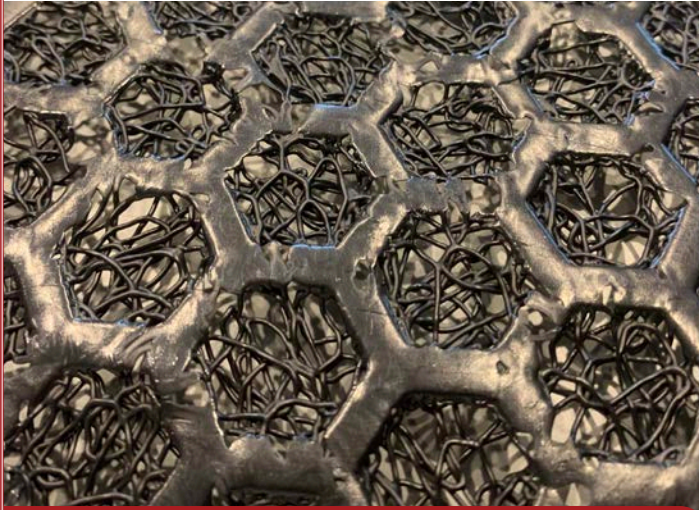

200 FT ROLL 1 PC/CTN 32 CTN/PLT

## KEEDELATH® HC UNCOUPLING

Vendor Item #UNC HC - Style #DE-UNC KEEDE-HC

*KeedeLath® HC (Honey Comb)™ manufactured with structured strand technology is a novel floor lath designed to reinforce underlayments installed over distressed substrates. KeedeLath® HC is designed to enhance the mechanical bond between the underlayment and the floor and to reinforce the underlayment to withstand flexural stresses. Suitable in commercial, residential and institutional applications, and compatible with many underlayments.*

- Enhances the mechanical bond between the underlayment and the substrate
- Light weight for easy installation
- Self Furring
- Hand safe, no protective gloves required

## KEEDEROLL® MT UNCOUPLING

Vendor Item #UNC MT- Style #DE-UNC KEEDE-MT

*KeedeRoll® MT's geometrical shape with entangled net ensure an effective, well bonded one step application to protect tile and grout from substrate movement. Bonded to a patented "Muffling" technology (MT) fabric KeedeRoll® MT provides exceptional reduction of sound and impact transmission. KeedeRoll® MT represents a simple, one step installation that protects the finished tile installation from substrate stresses all while significantly reducing sound and noise transmission in multifamily, residential and commercial environments.*

- Ideal for use under ceramic tile installations
- Helps prevent grout joint and tile damage
- "Extra Heavy Rated" on the Robinson-Type Wheel Test
- 21 point IIC Delta on 8" concrete
- Meets code on 8" concrete (54 IIC)
- Bridges in plane cracks up to 1/8" (3mm) without transfer to tile

## Premium Acoustical & Uncoupling Membrane

High Load Bearing Uncoupling and Sound Proofing Membrane



200 FT ROLL 1 PC/CTN 32 CTN/PLT







***LINT TILE***

111 NOTCH LANE WENDEL, PA 15691  
P: 800-245-5564 F: 724-446-9252  
[www.linttile.com](http://www.linttile.com)