


SPIRE



SPIRE SPECIFICATIONS									
PACKAGING									
PRODUCT DESCRIPTION	PCS/CTN	SF/CTN	SF/PLT	CTNS/PLT	DEPTH	PLT/CTNR	SF/CTNR	PLT SIZE	LBS/CTNR
7" x 48" - Value Engineered SPC Flooring Quantum X Technology	12	28.365	1418.25	50	4.7mm	N/A	N/A	N/A	N/A
PRODUCT		PERFORMANCE							
COLLECTION	Spire	TEST PERFORMED	ASTM	RATING					
CONSTRUCTION	SPC	IMPACT SOUND CONDUCTION-AIRBORNE SOUND CONDUCTION	E492-09 E90-09	IIC 55 db STC 53db					
LOCKING SYSTEM	Unilin™	RADIANT PANEL	E648	> 1.10					
WEAR LAYER	12 mil with QXT	SLIP RESISTANCE	ANSI A137,1	PASS					
THICKNESS	4.7mm	DIMENSIONAL STABILITY	F2199	PASS (RES,(avg, max) ≤0.25%, COM, (max))					
UNDERLAYMENT	1.2mm IXPE (NO VOC)	RESIDUAL INDENTATION	F1914	PASS (Average ≤ 0.18mm)					
INSTALLATION	Floating, Glue Down	STATIC LOAD RESISTANCE	F970	PASS (FOR COM ONLY, RES INDENT ≤ 0.13mm)					
COLORS	Copa, Berlin, Cancun, Dublin		NBS SMOKE DENSITY	E662	< 400				
ENVIRONMENTAL			RESISTANCE TO HEAT	F1514	PASS (avg, max) ΔE* < 8				
VOC REQUIREMENTS (ASTM 5116)	PASS		COEFFICIENT OF FRICTION	D2047	≥0.6 Dry				
INDOOR AIR QUALITY	Floor Score		RESISTANCE TO LIGHT	1515	PASS (avg, max) ΔE* < 8				
WARRANTY			RESISTANCE TO CHEMICALS	F925	(≤0.2%) PASS				
RESIDENTIAL	Limited Lifetime		RADIANT PANEL	648	> 0.45 W/CM2, NFPA CLASS 1				
LIGHT COMMERCIAL	5YRS		DYNAMIC COEFFICIENT OF FRICTION	E303	> 0.42				

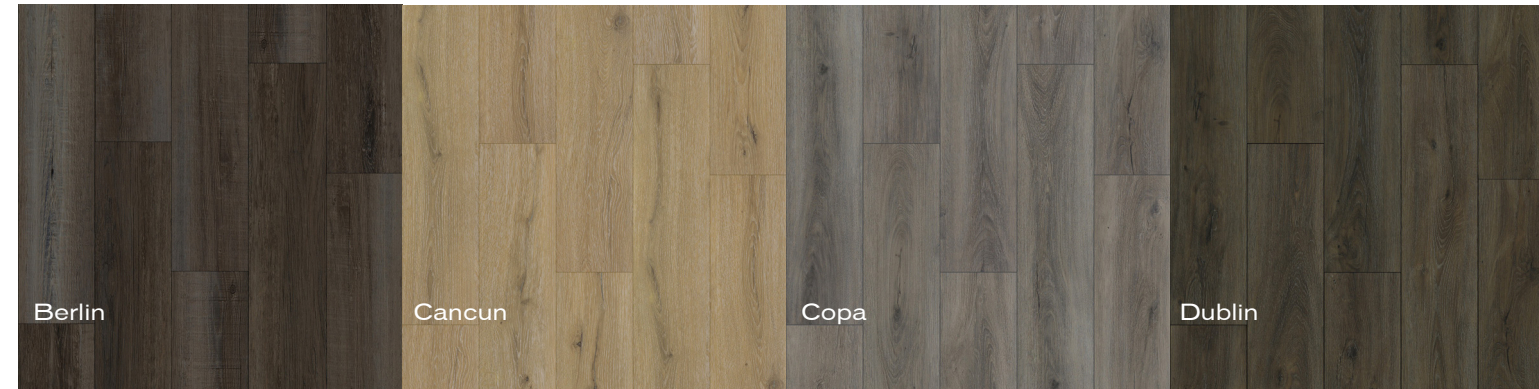

LINT TILE
 221 Lint Lane Irwin, PA 15642
 P: 800-245-5564 F: 724-446-9252
 www.linttile.com

SPIRE

Luxury Vinyl Tile



SPIRE - CANCUN



LINT TILE

SPIRE


Copa



Copa
17.5x120cm / 7"x48"
12mil Wear Layer

SPIRE

Cancun



Cancun
17.5x120cm / 7"x48"
12mil Wear Layer

SPIRE


Berlin



Berlin
17.5x120cm / 7"x48"
12mil Wear Layer

SPIRE

Dublin



Dublin
17.5x120cm / 7"x48"
12mil Wear Layer



SPIRE - COPA



SPIRE - BERLIN