



FOREST

Warm Chestnut



Forest
Warm Chestnut
17.5x120cm / 7"x48"
20mil Wear Layer

☐ COLOR DISPLAYED ON FRONT

FOREST

Silver Maple



Forest
Silver Maple
17.5x120cm / 7"x48"
20mil Wear Layer

☐ COLOR DISPLAYED ON FRONT

FOREST

Driftwood




Forest
Driftwood
17.5x120cm / 7"x48"
20mil Wear Layer

☒ COLOR DISPLAYED ON FRONT

FOREST

Golden Oak

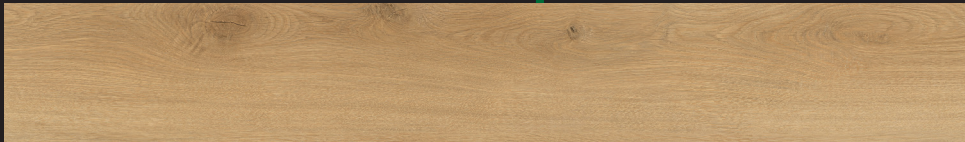

Forest
Golden Oak
17.5x120cm / 7"x48"
20mil Wear Layer

☐ COLOR DISPLAYED ON FRONT

FOREST

Natural Pine



Forest
Natural Pine
17.5x120cm / 7"x48"
20mil Wear Layer

☐ COLOR DISPLAYED ON FRONT

FOREST HD SPECIFICATIONS

PACKAGING										
PRODUCT DESCRIPTION	PCS/CTN	SF/CTN	SF/PLT	CTNS/PLT	DEPTH	PLT/CTNR	SF/CTNR	PLT SIZE	LBS/CTNR	
7" × 48" - Luxury Vinyl Plank Acoustic Cushioning	4	32.68	1797.19	55	5mm	20	35943.78	49"x40"x37"	51,280	
PRODUCT			PERFORMANCE							
COLLECTION		Forest		TEST PERFORMED		ASTM		RATING		
CONSTRUCTION		LVP		IMPACT SOUND CONDUCTION		E492-09		62		
LOCKING SYSTEM		N/A		SOUND TRANSMISSION CLASS		E90-09		64		
WEAR LAYER		20 mil (.5mm)		SLIP RESISTANCE		D2047		>0.8 Low Risk		
THICKNESS		3.5mm + 1.5mm pad		DIMENSIONAL STABILITY		F2199		PASS <.02"/ft		
ATTACHED CUSHION		1mm IXPE		RESIDUAL INDENTATION		F1914		PASS		
INSTALLATION		Direct Glue Down		STATIC LOAD LIMIT		F970		PASS		
COLORS	Golden Oak, Silver Maple, Warm Chestnut, Natural Pine, Driftwood		FLEXIBILITY			F137		PASS		
ENVIRONMENTAL			RESISTANCE TO HEAT			F1514		PASS		
INDOOR AIR QUALITY		UL Greenguard		RESISTANCE TO LIGHT			1515		PASS	
WARRANTY			RESISTANCE TO CHEMICALS			F925		5min - PASS	24hr - PASS	
RESIDENTIAL		25YRS		RADIANT FLUX			648		EXCEEDS CLASS 1	
LIGHT COMMERCIAL		20YRS		SMOKE DENSITY			E662		PASS	



LINT TILE

221 LINT LANE IRWIN, PA 15642 • P: 800-245-5564 • www.linttile.com



SCAN ME